

RESTRICTED
(DRAFT/PROVISIONAL)
QUALITY ASSURANCE PLAN
FOR
(END CAP ASSY)
DRG. NO: 175.70.030CB
(LF NO: 6206501116)

No. HVF/T-72C/QAP/70/ END CAP ASSY/391317-00

ISSUE No: 00

DATE: SEP 2021

QUALITY ASSURANCE (RIG ASSEMBLY)
HEAVY VEHICLES FACTORY
AVADI, CHENNAI – 600 054

QUALITY ASSURANCE PLAN (QAP)

FOR


END CAP ASSY

DRG. NO: 175.70.030CB

PREPARED BY


(V. BHASKAR)
JWM/QA (RIG-A)

REVIEWED BY


(G. S. Venk)
JWM/ QA (RIG-A)

APPROVED BY


(NEERAJ KUMAR)
DGM/QA-RIG-(A)

ISSUED BY

QUALITY ASSURANCE (RIG-ASSEMBLY)

HEAVY VEHICLES FACTORY

AVADI, CHENNAI – 600 054

S. no	CONTENTS	PAGE .No.
1.	IMPORTANT NOTES	4
2.	INTRODUCTION	4
3.	AIM	5
4.	SCOPE	5
5.	DOCUMENTS	5
6.	USED ON HIGHER ASSY	6
7.	BILL OF MATERIAL	6
8.	CONDITIONS OF USE/ STORAGE INSTRUCTIONS	6
9.	SAMPLING PLAN	7
10.	VISUAL INSPECTION	7
11.	DIMENSIONAL CHECKS	8
12.	MATERIAL CHECKS	9-11
13.	FITMENT / PERFORMANCE TEST/TRIAL	11
14.	INTERCHANGEABILITY	11
15.	TEST STANDS/JIGS/FIXTURES/GAUGES	11
16.	MARKING/IDENTIFICATION CHECKS	11
17.	PRESERVATION CHECK	11
18.	PACKING CHECK	12
19.	DOCUMENTATION	12
20.	REFERENCE	12
21.	ANNEXURE-A	13
22.	FIGURE	14
23.	APPENDIX-A	15

1. IMPORTANT NOTE;

Note-1

This is only a provisional and will be amended from time to time according to the requirement. No addition, deletion and reproduction will be done without the permission of The General Manager, Heavy Vehicles Factory, Avadi, and Chennai – 54.

Note –2

Any instruction contained in this does not prejudice the terms and conditions of the contract what so ever. In case of any contradiction between the contents of this QAP and the clause in the contract, the latter will prevail.

Note-3

The stores should be manufactured strictly as per the drawings supplied by the Inspection Authority only and not as per the samples, if any received by the manufacturer for guidance purpose.

Note-4

Any amendment issued by the Inspection Authority shall be incorporated in the QAP and the records for the amendments carried out should be maintained as per the Performa at Appendix-"A".

Note-5

In case of any contradiction between the contents of this QAP and drawings issued along with the contract, the latter will prevail.

2. INTRODUCTION;

- a) This quality plan lays down the inspection and testing procedure to be carried out on the **END CAP ASSY DRG.NO.175.70.030CB** being procured indigenously. This is prepared, based on the acceptance standards and inspection parameters laid down in collaborators documents and on the inspection test standards followed in respect of similar indigenous items.
- b) This QAP is the property of Government of India and is liable for amendments as and when required. The General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054, is the inspecting Authority for this assembly. Any query / clarification on the content of this QAP shall be referred to this Factory. Any departure from these instructions is allowed only after written approval from the above authority. Notwithstanding the tests indicated in this QAP, the inspecting Officer has the right to carry out any test to check conformance to the paper particulars quoted in the Supply Order, which he may consider necessary to satisfy himself about the stores which he has to accept.

3. AIM:

The QAP is aimed at standardizing the Inspection procedure and acceptance norms for **END CAP ASSY DRG.NO.175.70.030CB**. It also aims at giving adequate information to the manufacturer on the quality requirements so that the required quality control methods are established. This is also meant to guide authorized Inspection Officer in his routine inspection and to set out main points to which his attention must be drawn to ensure that the accepted stores meet the stipulated standards.

4. SCOPE:

This QAP outlines in general terms, the checks and methods to be used during inspection of **END CAP ASSY DRG.NO.175.70.030CB** including the technical requirements of the drawings. The recommended Quality Plan stipulated herein is mandatory and should be strictly adhered to.

Note:

- i. Tender enquiry (TE) and supply order (S.O) will be issued with QAP stating that inspection will be done as per QAP.
- ii. In case of TE, It is responsibility of the vendor to obtain the copy of QAP and give the statement of compliance that vendor will abide by the QAP in case supply order is placed.
- iii. In case of S.O, it is the responsibility of the vendor to obtain copy of QAP and give the statement of compliance that the vendor will follow QAP. However, GM/HVF reserves the right to revise/update the QAP from time to time.

5. DOCUMENTS:

- a) On placement of firm supply order, one set of certified drawings will be forwarded to the Contractor. One set of relevant specification and technical instructions on the subject item can be obtained from AHSP through DDO/HVF.
- b) Any clarification required on these documents should be obtained from the Inspecting Authority i.e. The General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054. Equivalents to the collaborators specifications and standards will be decided only by the Inspecting Authority and should not be unilaterally decided.
- c) The process instruction sheets supplied by the collaborators are available with the DDO/HVF, Avadi, Chennai for reference (i.e. Forging, casting, machining, extrusion, forming, manufacturing, heat treatment and plating process etc.) Where ever applicable.
- d) The supplier after scrutiny of the concerned process sheets and connected paper particulars should establish the necessary production and inspection facilities. Particularly the inspection test rigs, stands, fixtures, templates, gauges etc should be provided as recommended in these process sheets.

6. USED ON HIGHER ASSY;

The END CAP ASSY drg.no.175.70.030CB is used for higher assembly to drg.no. 175.70.001cb-1.

7. BILL OF MATERIAL;

Sl. No.	DRG. No.	NOMENCLATURE	MATERIAL SPECIFICATIONS	QTY.	REMARKS
	175.70.030CB & ITEM LISTS	END CAP ASSY	--	--	
1	175.70.131	NUT	STEEL 40 J11 GOST 977-75	1	
2	172.70.056	ROPE 1.8J1200	A 200 m LENGTH OF ROPE 1-8 GOST 2172-71	1	W/D
3	155.33.226	STRAP	2 GOST 19904 - 90 K270B 6-II-F-10kn GOST16523-97	1	
4	54.26.399-1	GASKET	PLATE 254311-2 RUBBER K068-1 TY005216-75	1	
5	GOST 3282-74	WIRE 0.5-0-4	GOST 3282-74	-	

Note: Vendor/Contractor may use approved alternate material issued by the tender/ supply order issuing authority in writing (if available).

8. CONDITIONS OF USE/STORAGE INSTRUCTIONS

This assy should be properly packed to protect from transit / handling damage and influence of atmospheric precipitations. In addition, the following parameters should be ensured: -

- a) The threaded parts are to be covered with suitable plastic caps to prevent damages.
- b) Each assy should be placed separately.
- c) The stores are to be suitably covered for preventing ingress of dust and dirty/entry of sunlight and moisture.
- d) The packaging slip shall contains
 - (i) Certificate of testing (NABL)
 - (ii) Guarantee/ Warranty Certificate
 - (iii) Delivery Slip with Inspector's Acceptance Mark.
 - (iv) Under taking certificate/certificate of conformance.
- e) The stores are not permitted to be stored together with oils. Petrol, acids, alkaline and other substances to avoid damage to the metal / rubber components.

9. SAMPLING PLAN:

Sl. No.	Sampling Plan	Pilot *	Bulk
(i)	Visual Inspection	100%	100%
(ii)	Dimensional Check	100%	General Inspection level II, single sampling, Normal Inspection, AQL 1.5 of IS 2500 (Part-I)-2000
(iii)	Material check	1 No	1 No for each batch of raw material or Heat treatment lot as required by specification.
(iv)	Fitment/Performance test/Trial	1 No.	1 No. as and when required.
(v)	Interchangeability test	2 No's	2 No's Randomly basis, except selective assy.
(vi)	Test stands/jigs/ fixtures/ gauges and calibration checks	100%	100 %
(vii)	Marking/Identification	100%	100%
(viii)	Packing/preservation	100%	100%

* This clause is applicable if mentioned in supply order or project sanction order in case of Make-II.

Note:- A New supplier should supply bulk only after pilot sample inspection/ evaluation by HVF and obtain bulk production clearance from HVF.

10. VISUAL INSPECTION [Sampling plan as per Para- 9 (i)]

- a) The stores are to be visually examined on 100 % of pilot /bulk and same should be free from any defects and all the finishing requirements shall satisfy as indicated in technical conditions/requirements of the assy / component drawing respectively.
- b) The components shall be checked for the following and should be free from the defects:
 - Defects in construction
 - Fitment of all components
 - Presence of foreign particles
 - Moisture and dust
 - Corrosion of metal parts
 - Mechanical imperfections & distortion
 - Any form of deterioration of material and finishing.
- c) Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

11. DIMENSIONAL CHECKS [Sampling plan as per Para- 9 (ii)]

The dimensions of individual component, sub assy and major assy shall be checked and ensured as per respective drawings. Dimensional checks should be carried out as per sampling plan. However, the inspecting authority/rep. may at his discretion, tighten the inspection level and acceptance quality level on the critical items and adopt check point during manufacture.

11.01) END CAP ASSY (175.70.030CB)

- a) The dimensions should be confirmed as per drawing specification.
- b) All the technical requirements (T.R) points to be ensured as drawing specification and as given below;
 1. FOR WIRING AROUND IT IS POSSIBLE TO USE WIRE 0-5-0-CGOST 3282-74 .
 2. WIRE BANDING IS TO BE SOLDERED AROUND WITH SOLDER П0С-4 GOST 21930-76 OR GOST 21931-76 .

11.02) NUT (175.70.131)

- a) All the dimensions should be confirmed as per drawing specifications.
- b) All technical requirements (T.R) points to be ensured as per drawing.
 1. THE CASTING SHOULD COMPLY WITH 172.TY.10 FOR ACCEPTANCE
 2. OF COMPONENTS CAST AS PER INVESTMENT PATTERNS.
 3. STRAIGHT KNURLING 1.2 OST 28018 MAY BE DONE INSTEAD OF DIAMOND KNURLING.
 4. CASTINGS ON THREAD M33 x1.5 AFLECTING NOT MORE THAN 1 THREAD BY 1/5 OF ITS DIAMETER ARE ALLOWED.
 5. COATING: Zn 8 CHROMATISING PRESENCE OF COATING ON INTERIOR SURFACE NOT TO BE CHECKED.
 7. COATING OF OUTER SURFACE PRIMER 01T-03K KHAKI ENAMEL XB.518 REQUIREMENTS AS PER 520 TY 5.
 8. SHOULDERS IN PLACES OF TRANSITION OF KNURLED SURFACE ON R2.5 IS ALLOWED.
 9. MACHINING (RECESSING) IS ALLOWED ALONG RADI R1.5.
 10. RECESS MADE BY DRILLING TO A DEPTH NOT EXCEEDING 1.5mm IS ALLOWED ON SURFACE A.

11.03) ROPE 1.8 L200 (172.70.056) WITHOUT DRG

- a) The dimensions and technical requirements (T.R) points should be confirmed as per higher drawing specifications/GOST 2172.

11.04) STRAP (155.33.226)

- a) All the dimensions should be confirmed as per drawing specifications.
- b) All technical requirements (T.R) points to be ensured as per drawing.
 1. Coating - Zn 21 - Chromatizing.
 2. * Dimensions for references.
 3. Other requirements by 520.TY1.

11.05) GASKET (54.26.399-1)

- c) All the dimensions should be confirmed as per drawing specifications.
- d) All technical requirements (T.R) points to be ensured as per drawing.

11.06 WIRE0.5-0-4 L-200 (GOST-3282-74)

- a) The component should be manufactured as per GOST 3282-74.
- b) For other requirements refer GOST 3282-74.

12) MATERIAL CHECKS [SAMPLING PLAN AS PARA – 9 (iii)]

Material specimen /test bars of the components shall be in conformity as per the material mentioned in the relevant documents/drawings as per the bill of materials (BOM). NABL test reports for all the parameters as per relevant specifications to be submitted. Test samples to be submitted by the vendor to HVF, if required. The material check will be carried out as per sampling plan. However, if the manufacturer proposes any alternative material at the stage of tender enquiry, the same has to be approved and a written concurrence should be obtained from AHSP through DDO/HVF, before usage of such materials.

12.01) NUT (175.70.131)

- a) The component should be manufactured from STEEL 40ЛI GOST 977-75.
- b) Alternate material:
MANUFACTURING FROM STEEL 45Л I, GOST 977-75 IS ALLOWED.
- c) **STEEL 080M40 (EN 8) TO BS. 970 Pt. 1-1983.**
- d) The chemical composition and mechanical properties of steel grades 40ЛI as per GOST 977-75 given below, for other requirements refer GOST 977-75 .

THE CHEMICAL COMPOSITION AND MECHANICAL PROPERTIES ARE AS UNDER.
CHEMICAL COMPOSITION %

GRADE OF STEEL	CONTENT OF ADMIXTURE										
	C	Mn	Si	S	P	Cr	Ni	Mo	V	Cu MAX	Ti
40 ЛI	0.37 - 0.45	0.40 - 0.90	0.20 - 0.52	0.05	0.05	0.30	0.30	—	—	0.30	—
45 ЛI	0.42 - 0.50	0.40 - 0.90	0.20 - 0.52	0.05	0.05	0.30	0.30	—	—	0.30	—

MECHANICAL PROPERTIES :-

GRADE	YIELD STRENGTH N/mm ² Kgf /mm ²	U T S N/mm ² Kgf /mm ²	ELONGATION %	REDUCTION OF AREA %	IMPACT STRENGTH Kgm /cm ²
	MAXIMUM				
40 ЛI	300 (30)	530 (53)	14	25	3.0
45 ЛI	320 (32)	550 (55)	12	20	3.0

12.02) ROPE 1.8 L200 (172.70.056) WITHOUT DRG

- a) The Material Properties & other Technical requirements should & confirmed to GOST 2172-71.
- b) The chemical composition and mechanical properties should be conformed as per refer GOST 2172.

12.03) STRAP (155.33.226)

- a) The component should be manufactured from K270B 6-II-Г-10КП GOST 16523-97.
- b) Alternate material:

2 GOST 19904-90
K330B 5-II-15 GOST 16523-97

- c) The chemical composition and mechanical properties of steel grades K270B 6-II-Г-10КП as per GOST 16523-97 is given below table.

5. a) CHEMICAL COMPOSITION:- AS PER GRADES 15 & 10 Kn GOST 1050-74.

GRADE OF STEEL	CONTENT OF ELEMENTS %					
	C	Si	Mn	Cr	S	P
15	0.12-0.19	0.17-0.37	0.35-0.65	0.25	0.040	0.035
10 Kn	0.07-0.14	0.07 MAX	0.25-0.50	0.15	0.040	0.035

RESIDUAL CONTENT OF COPPER & NICKEL SHOULD NOT EXCEED 0.25 % EACH.

b) MECHANICAL PROPERTIES:- AS PER GRADES 15 & 10 Kn GOST 16523-70.

GRADE OF STEEL	TENSILE STRENGTH Kg/mm ²	ELONGATION % MIN	BEND TEST BY 180° IN COLD STATE
15	34-47	24	ONE THICKNESS
10 Kn	28-40	26	

12.04) GASKET (54.26.399-1)

- a) The component should be manufactured from RUBBER HO68-1 TY 005 216-75.
- b) Alternate material:

Plate 254311-2
Rubber 316
TY: 005216-75

- c) Alternate material:

Rubber Plate 254311-2
Rubber 360

- d) The chemical composition and mechanical properties of steel grades RUBBER HO68-1 as per TY 005216-75 refer for other requirements refer TY 005216-75

HO 68-1 TO TY 005216-75 THE TECHNICAL PARAMETERS OF THE SUBJECT ITEM SHOULD BE AS FOLLOWS.

NOMENCLATURE OF RUBBER	COILED PLATES WITHOUT CLOTH GASKETS.
WORKING MEDIA	OIL, BENZENE AND DIESEL
OPERATING TEMP. °C	-50° TO +100°C.
DESTINATION & LIMIT PARAMETERS OF USE	PROTECTING FROM DUST & SPLASHES.
HARDNESS	55-70
RUPTURE STRENGTH Kg/cm ² (NOT LESS THAN)	90
ELONGATION OF RUPTURE. % (NOT LESS THAN)	250
RESIDUAL ELONGATION AFTER RUPTURE (NOT MORE THAN)	12
DENSITY g/cm ³	1.24±0.05

12.05) WIRE 0.5-0-4 L-200 (GOST 3282-74)

- a) The component should be manufactured as per GOST-3282-74.
- b) The chemical Composition & mechanical properties should be conformed as per refer GOST 3282-74.

13) FITMENT/PERFORMANCE TEST/TRIAL:

- a) Pilot samples should be checked for fitment / Performance test to ascertain the efficacy of the system under different operating conditions by fitting in higher assembly and repeating it for functional checks & performance to be monitored, wherever required.
- b) Bulk supply may be subjected to performance trial in higher assembly in case of repeated failure/defects during exploitation.

14) INTERCHANGEABILITY:

The assemblies should be interchangeable component wise and assembly wise, except the Component are to be supplied as a set and to be assembled selectively.

15) TEST STANDS/JIGS/FIXTURES/GAUGES & CALIBRATION CHECKS:

- a) The supplier / Contractor should Manufacture a suitable Test Stand/ jigs/ fixture / mandrels and gauges as per process sheet to carry out quality checks/performance test and to ensure conformance of components/assy as per drawing specification / T.R points.
- b) The supplier/contractor should submit calibration reports for instruments/fixtures/gauges etc., which are used during inspection activities.

16) MARKING/IDENTIFICATION CHECKS:

For traceability, marking of part No., Manufacturer name, supply order No, Serial No/Qty, batch No. and manufacture date & year are to be carried out in all components. Suitable method of marking can be adopted, provided the above details are legible. Inscription if any as called for in the relevant drawing is also to be carried out.

17) PRESERVATION CHECK:

- a) Preservative coatings are to be strictly adhered to as called for in the drawing/T.R points. However, equivalent BIS Standards can also be followed, subject to the thickness of the coating is maintained as per the drawing.
- b) Other preservations as necessary to prevent damages due to moisture and dust during process, storage and transit are to be carried out as per drawing/T.R points. Conventional methods can also be resorted to.

18) PACKING CHECK:

- a) Components / Assemblies are to be packed separately to avoid damages during transit / handling of the same. Part No. and No. of sets are to be marked on the packing.
- b) Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

19) DOCUMENTATION:

- a) Firm has to maintain all the documents as per QAP with respect to the Sl.No.to have traceability.
- b) Vendor has to submit Bill of materials, Material test reports, Class 'C' /Endurance test reports (wherever specified in drg/TY specification/QAP) and Complete PIR (pre-inspection report) at the time of offering the item for inspection. HVF will commence the inspection only after scrutiny of these documents.
- c) Pre inspection reports (PIR) of firm like,
 - 1) Chemical analysis, Mechanical properties obtained from NABL as per bill of material (BOM) with respect to material specifications.
 - 2) Pre-forming process report as per process sheets.
 - 3) Coating certificates, hardness reports and heat treatment certificates(Wherever applicable)
 - 4) Calibration reports of instruments and gauges.
 - 5) 100% Dimensional inspection reports (including T.R points) as per bill of material are to be submitted.
- d) The testing/inspection responsibility to test all the parameters as per QAP and drawing specifications as mentioned in Annexure -A (enclosed).

20) REFERENCES:

- a) Refer all drawings to 175.70.030CB (Drawing dated 19.8.88)
- b) Refer all material specifications like GOST, IS, & TY... etc. Refer to dimensional and material checks clauses in this QAP.

END CAP ASSY (175.70.030CB)

ANNEXURE-A:

SL. NO	CATEGORY	TESTS/INSPECTION PARAMETERS	STANDARDS TO BE REFERRED	ACCEPTANCE CRITERIA	INSPECTION RESPONSIBILITY			REMARKS
					Firm	HVF	DGQA	
1.	Pre inspection reports (PIR) of firm	Firm has to produce all the document as per QAP	As per the relevant drawing and QAP.	Conform to drawing and QAP as per bill of material	P	V	R	100% by firm/ vendor.
2.	Bill of material (BOM)	Firm has to prepare the BOM as per QAP	QAP Para no: 7 or item list.	Conform to QAP	P	V	R	100% by firm/ vendor.
3.	Dimensional checks	Dimensions as per the drawing	drawing/QAP Para no: 11	Conform to drawing and QAP Para no: 11	P	W/P	R	100% by firm/ vendor, SP followed by HVF.
4.	Material tests	Chemical composition & Mechanical Properties	As per the relevant drawing and QAP	conform with QAP and Drawings	P	W/V	R	Refer note.
5.	Marking / traceability checks	Marking / traceability	QAP Para no 16	Conform to QAP Para no 16	P	V	R	100% by firm/ vendor
6.	Preservation & packing checks	Preservation & packing	QAP Para no 17 & 18	Conform to QAP Para no 17 & 18	P	V	R	100% by firm/ vendor.

Note:

1. One sample per heat/batch shall be tested under NABL Lab/Govt. Approved lab by firm. In case of non-compliance to standards entire lot will be rejected or not to use in production further.
2. For cross conformation, manufacturer has to submit test samples /HVF will draw samples from supplied lot on receipt for Witnessing (W) at HVF premises. In case of non-compliance to standards entire lot will be rejected.

P- Perform W- Witness V-Verify R-Review SP-Sampling Plan

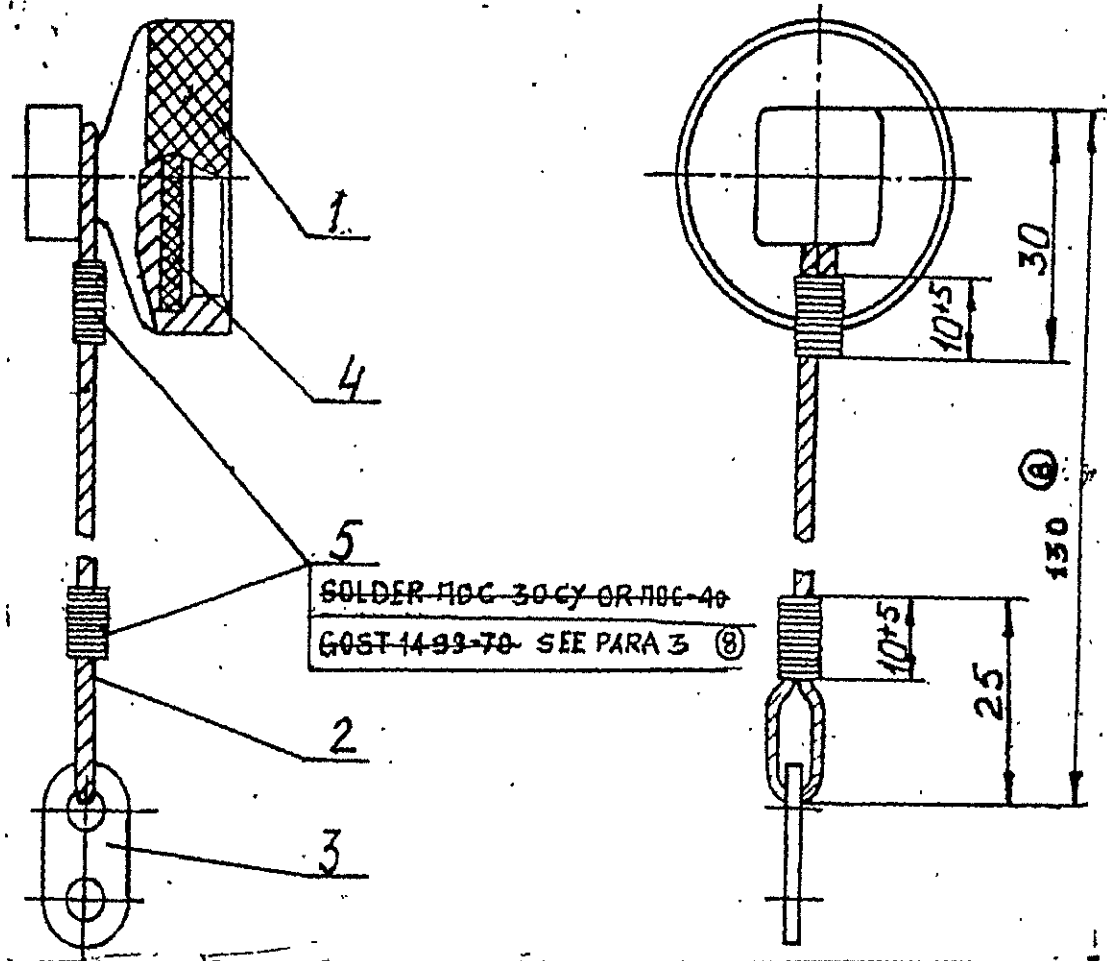


FIGURE. END CAP ASSY (175.70.030CB)
 (For reference only)

RECORD OF AMENDMENTS

Sl. No	Amendment No. & date	Amended by	Date of Insertion	Initial